

# Flexim FLUXUS G736 Ultrasonic Flowmeter



## Gas Ultrasonic Flowmeter for Permanent Installation

### Features

- 4 measuring channels to compensate highly disturbed flow profiles and to facilitate more accurate and repeatable measurements
- Best suitable for applications with limited straight runs
- High precision at fast and slow flow rates, high temperature and zero point stability

### Applications

- Redundant check metering to custody transfer flow measurements
- Flow and density measurement in gas transport systems
- Wet gas flow measurement on wellheads and after separators

## Transmitter

### Technical data

	FLUXUS G736**-NN	FLUXUS G736**-A2	FLUXUS G736**-F2		
					
design	field device with 4 measuring channels in stainless steel housing				
measurement					
measurement principle	transit time difference correlation principle				
flow direction	bidirectional				
synchronized channel averaging	x				
flow velocity	ft/s	measuring range: 0.03 to 115, depending on pipe diameter			
repeatability		0.15 % MV ±0.02 ft/s			
fluid	all acoustically conductive gases, e.g., nitrogen, air, oxygen, hydrogen, argon, helium, ethylene, propane				
temperature compensation	corresponding to the recommendations in ANSI/ASME MFC-5.1-2011				
measurement uncertainty (volumetric flow rate)					
measurement uncertainty of the measuring system <sup>1</sup>	±0.3 % MV ±0.02 ft/s	includes calibration certificate traceable to NIST			
measurement uncertainty at the measuring point	±1 to 2 % MV ±0.02 ft/s, contact FLEXIM for an application specific uncertainty evaluation				
transmitter					
power supply		<ul style="list-style-type: none"> <li>• 90 to 250 V/50 to 60 Hz or</li> <li>• 11 to 32 V DC</li> </ul>			
power consumption	W	< 15			
number of measuring channels		4 (1 measuring point)			
damping	s	0 to 100 (adjustable)			
measuring cycle	Hz	100 to 1000			
response time	s	1			
housing material	stainless steel 316L				
degree of protection	IP66				
dimensions	inch	see dimensional drawing			
weight	lb	15.9			
fixation	wall mounting, optional: 2" pipe mounting				
ambient temperature	°F	-40 to +140 (< -4 without operation of the display)			
display	128 x 64 pixels, backlight				
menu language	English, German, French, Spanish, Dutch, Russian, Polish, Turkish, Italian, Chinese				
explosion protection					
• ATEX					
marking	-	CE  II3G Ex nA ic IIC T4 Gc T <sub>a</sub> -40...+60 °C	-		
• FM					
marking	-	-	 NI/Cl. I, II, III / Div. 2 / GP, A, B, C, D, E, F, G / T5 -20 °C ≤ Ta ≤ 55 °C IP64		
certification	-	-	FM23US0080, FM23CA0059		
measuring functions					
physical quantities	operating volumetric flow rate, standard volumetric flow rate, mass flow rate, flow velocity, optional: gas energy flow rate (DGM)				
totalizer	volume, mass, optional: gas energy (DGM)				
diagnostic functions	sound speed, signal amplitude, SNR, SCNR, standard deviation of amplitudes and transit times				
communication interfaces					
service interfaces	measured value transmission, parametrization of the transmitter: <ul style="list-style-type: none"> <li>• USB<sup>2</sup></li> <li>• LAN<sup>2</sup></li> </ul>				
process interfaces	max. 1 option:	max. 1 option:	max. 1 option:		
	<ul style="list-style-type: none"> <li>• Modbus RTU</li> <li>• BACnet MS/TP</li> <li>• HART</li> <li>• Modbus TCP</li> <li>• BACnet IP</li> <li>• Profibus PA</li> <li>• FF H1</li> </ul>	<ul style="list-style-type: none"> <li>• Modbus RTU</li> <li>• BACnet MS/TP</li> <li>• HART</li> <li>• Profibus PA</li> <li>• FF H1</li> </ul>	<ul style="list-style-type: none"> <li>• Modbus RTU</li> <li>• BACnet MS/TP</li> <li>• HART</li> <li>• Profibus PA</li> <li>• FF H1</li> </ul>		

<sup>1</sup> with aperture calibration of the transducers


<sup>2</sup> outside the explosive atmosphere (housing cover open)

	<b>FLUXUS G736**-NN</b>	<b>FLUXUS G736**-A2</b>	<b>FLUXUS G736**-F2</b>		
<b>accessories</b>					
data transmission kit	USB cable				
software	<ul style="list-style-type: none"> <li>• FluxDiagReader: reading of measured values and parameters, graphical representation</li> <li>• FluxDiag (optional): reading of measurement data, graphical representation, report generation, parametrization of the transmitter</li> </ul>				
<b>data logger</b>					
loggable values	all physical quantities, totalized physical quantities and diagnostic values				
capacity	max. 800 000 measured values				
<b>outputs</b>					
	The outputs are galvanically isolated from the transmitter.				
number	active current inputs and outputs: max. 4				
• <b>switchable current output</b>					
	configurable according to NAMUR NE43 All switchable current outputs are jointly switched to active or passive.				
number	max. 4				
range	mA	4 to 20 (alarm current: 3.2 to 3.99, 20.01 to 24, hardware fault current: 3.2)			
uncertainty		0.04 % of output value $\pm 3 \mu\text{A}$			
active output		$R_{ext} = 250$ to $530 \Omega$ , $U_{opencircuit} = 28 \text{ V DC}$			
passive output		$U_{ext} = 9$ to $30 \text{ V DC}$ , depending on $R_{ext}$ ( $R_{ext} < 458 \Omega$ at $20 \text{ V}$ )			
current output in HART mode		option			
• range	mA	4 to 20 (alarm current: 3.5 to 3.99, 20.01 to 22, hardware fault current: 3.2) $R_{ext} = 250$ to $530 \Omega$ , $U_{opencircuit} = 28 \text{ V DC}$ $U_{ext} = 9$ to $30 \text{ V DC}$ , depending on $R_{ext}$ ( $R_{ext} = 250$ to $458 \Omega$ at $20 \text{ V}$ )			
• digital output					
number	max. 4				
functions		<ul style="list-style-type: none"> <li>frequency output</li> <li>binary output</li> <li>pulse output</li> </ul>			
type	open collector (passive)				
operating parameters	8.2 V/30 mA (NAMUR)				
max. values	8 mA at 29 V DC				
<b>frequency output</b>					
• range	kHz	2 to 10			
• damping	s	0 to 999.9			
• pulse-to-pause ratio		1:1			
<b>binary output</b>					
• binary output as alarm output		limit, change of flow direction or error			
<b>pulse output</b>					
• pulse value	units	0.01 to 1000			
• pulse width	ms	0.05 to 1000			
• pulse rate		max. 10 000 pulses			
<b>inputs</b>					
	The inputs are galvanically isolated from the transmitter.				
number	active current inputs and outputs: max. 4				
• <b>temperature input</b>					
number	max. 4				
type	Pt100/Pt1000				
connection	4-wire				
range	°F	-238 to +1040			
resolution	K	0.01			
accuracy		$\pm 0.01 \% \text{ MV} \pm 0.03 \text{ K}$ at $64$ to $82 \text{ °F}$ $\pm 0.01 \% \text{ MV} \pm 0.03 \text{ K} \pm 0.0005 \% / \text{K}$ at $<64 \text{ °F} / >82 \text{ °F}$			
cable resistance	Ω	max. 1000			
• <b>switchable current input</b>					
	All switchable current inputs are jointly switched to active or passive.				
number	max. 4				
accuracy		$\pm 0.1 \% \text{ MV} \pm 0.01 \text{ mA}$ at $64$ to $82 \text{ °F}$ $\pm 0.1 \% \text{ MV} \pm 0.01 \text{ mA} \pm 0.005 \% / \text{K}$ at $<64 \text{ °F} / >82 \text{ °F}$			
resolution	µA	0.1			
active input		$R_{int} = 75 \Omega$ , $I_{max} \leq 30 \text{ mA}$ $U_{opencircuit} = 28 \text{ V}$ (open circuit) $U_{min} = 21.4 \text{ V}$ at $20 \text{ mA}$			
• range	mA	0 to 20			
passive input		$U_{ext} = 24 \text{ V}$ , $R_{int} = 35 \Omega$ , $I_{max} \leq 24 \text{ mA}$			
• range	mA	0 to 20			


1 with aperture calibration of the transducers

2 outside the explosive atmosphere (housing cover open)

## Dimensions

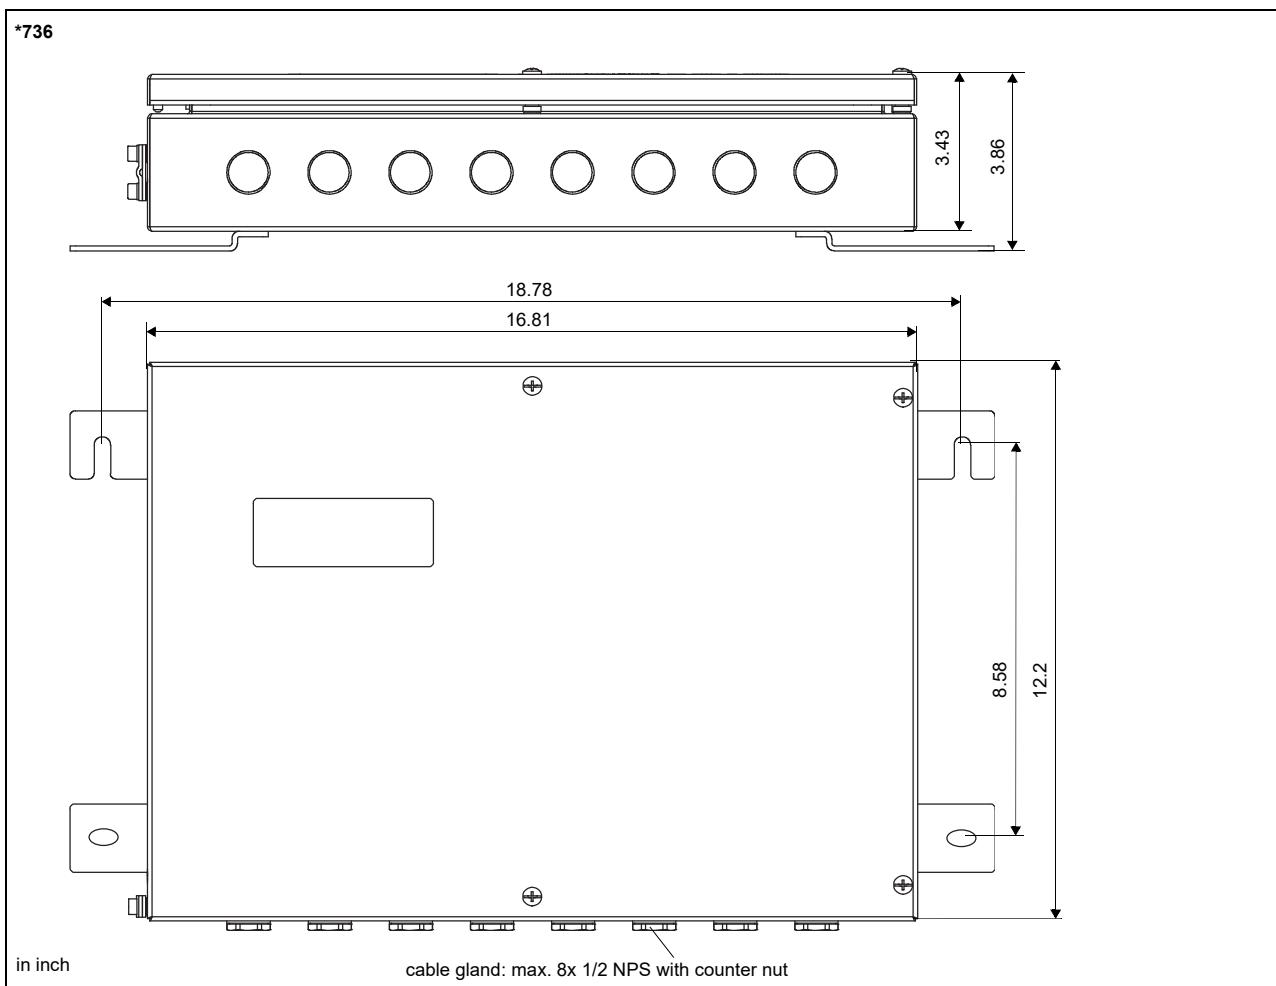

## Wall and 2" pipe mounting kit

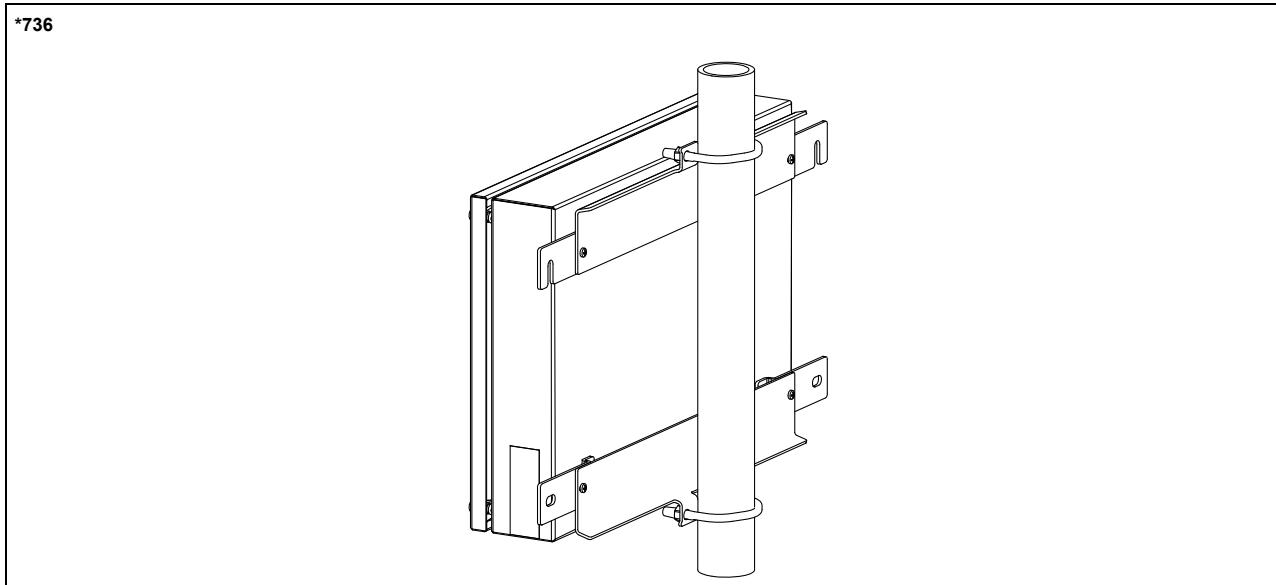

## Storage

- do not store outdoors
- store within the original package
- store in a dry and dust-free place
- protect against sunlight
- keep all openings closed
- storing temperature: -4...+140 °F

## Terminal assignment

\*736

equipotential bonding terminal

power supply <sup>1</sup>			
AC		DC	
terminal	connection	terminal	connection
L	outer conductor	(+)	+
N	neutral conductor	(-)	-
	protective conductor		protective conductor

<sup>1</sup> cable (by customer): e.g., flexible wires, with insulated wire ferrules, wire cross-section: AWG14 to 24

transducers, extension cable				
measuring channel A		measuring channel B		transducer
terminal	connection	terminal	connection	
AV	signal	BV	signal	
AVS	internal shield	BVS	internal shield	
ARS	internal shield	BRS	internal shield	
AR	signal	BR	signal	

outputs, inputs <sup>1, 2</sup>	
terminal	connection
depending on configuration	current output, digital output, current input
1, 2, 3, 4 5, 6, 7, 8 9, 10, 11, 12 13, 14, 15, 16	temperature input
33+, 34-	passive current output/HART
33-, 34+	active current output/HART
33, 34	Modbus RTU, BACnet MS/TP, Profibus PA, FF H1

temperature probe		
terminal	direct connection	connection with extension cable, inline temperature probe
1, 5, 9, 13	red	white
2, 6, 10, 14	white	red
3, 7, 11, 15	red	black
4, 8, 12, 16	white	green

USB	type C Hi-Speed USB 2.0 Device	service (FluxDiag/FluxDiagReader)
LAN	RJ45 10/100 Mbps Ethernet	<ul style="list-style-type: none"> <li>service (FluxDiag/FluxDiagReader)</li> <li>Modbus TCP</li> <li>BACnet IP</li> </ul>

<sup>1</sup> cable (by customer): e.g., flexible wires, with insulated wire ferrules, wire cross-section: AWG14 to 24

<sup>2</sup> The number, type and terminal assignment are customized.



## Transducer mounting fixture

PermaRail	PermaLok PL	quick release clasps and tension straps
transducer frequency M, P	transducer frequency M, P, Q	

for further data see Technical specification TS\_G7xx-transducersVx-xxx\_Lus

## Coupling materials for transducers

	normal temperature range	extended temperature range			
	< 212 °F	< 338 °F	< 302 °F	< 392 °F	392 to 464 °F
< 24 h	coupling compound type N or coupling pad type VT	coupling compound type E or coupling pad type VT	coupling compound type E or coupling pad type VT	coupling compound type E or H or coupling pad type VT	coupling pad type TF
	coupling pad type VT				

for further data see Technical specification TS\_G7xx-transducersVx-xxx\_Lus

## Damping material

	damping mat	damping coat
item number	992080-11	992080-10
type	E30R4	E30R3



for further data see Technical specification TS\_G7xx-transducersVx-xxx\_Lus

## Connection systems

connection system TS		
connection with extension cable	direct connection	transducers technical type
JB02, JB03, JB04 		*****52
connection system T1		
connection with extension cable	direct connection	transducers technical type
JB01 		*****8*
JB01, JBP2, JBP3 		*****L1*

for further data see Technical specification TS\_G7xx-transducersVx-xxx\_Lus

## Temperature probes

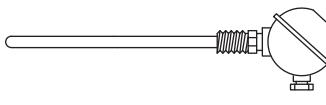PT13N	PT13F	A2179
<ul style="list-style-type: none"> <li>Pt1000</li> <li>clamp-on</li> <li>-40 to +392 °F</li> </ul>	<ul style="list-style-type: none"> <li>Pt1000</li> <li>clamp-on</li> <li>response time: 8 s</li> <li>-49 to +482 °F</li> </ul>	<ul style="list-style-type: none"> <li>Pt1000</li> <li>inline</li> <li>-58 to +500 °F</li> </ul>
direct connection		
		
connection with extension cable		
extension cable		
		

For more information: [Emerson.com](https://Emerson.com)

© 2024 Emerson. All rights reserved.

Emerson Terms and Conditions of Sale are available upon request.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Flexim is a mark of one of the Emerson family of companies. All other marks are the property of their respective owners.