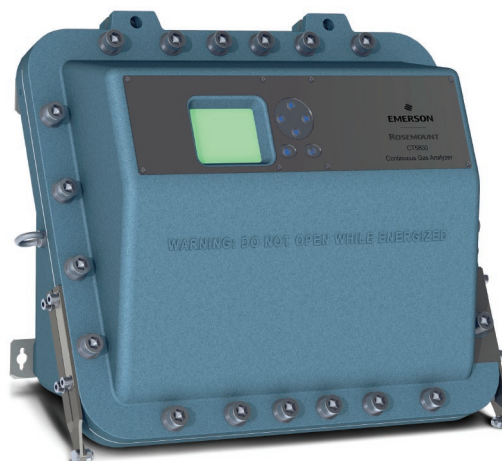


Rosemount™ CT5800 Flameproof Process Gas Analyzer

The Rosemount™ CT5800 Flameproof Process Gas Analyzer is the first Quantum Cascade Laser (QCL) analyzer designed for industrial process applications requiring Class I, Division 2 hazardous area certification.

Built within a flameproof enclosure, the Rosemount CT5800's unique cell design enables high accuracy measurement of concentrations of impurities down to low ppm levels in the gas streams, and is ideal for hydrogen purity, nitrogen purity, and ethylene purity applications. With up to six laser modules housed inside the same enclosure, the Rosemount CT5800 analyzer can measure up to twelve components simultaneously, greatly reducing the need for multiple analyzers.



Rosemount CT5800 Flameproof Process Gas Analyzer

Features and benefits

Multi-component QCL analyzer

- Measures up to twelve gases simultaneously
- Accurate and sensitive gas measurements
- Excellent linearity of response and repeatability
- Low long term drift minimizes calibration intervals
- Low maintenance and low lifetime costs
- Continuous health diagnostic reporting
- Embedded ARM processor for fully autonomous operation
- Intuitive simple front panel user interface allows access to all instrument functions

Field serviceable and field configurable

- Interchangeable modular configuration for up to six lasers

Hazardous certification

- Europe: ATEX II 2G Ex d IIB+H2 T4
IECEX: IECEX SIR 17.0026X ATEX: Sira 17ATEX1094X
- North America: Class I, Division 2, groups B, C, D

Engineered sample handling systems

A process gas analyzer is only as good as the quality of the sample it measures, which is why Emerson™ provides custom-engineered sample handling systems designed to meet the application's specifications and rigorously tested before they ship to the customer.

Applications

Process gas stream purity applications including:

- Hydrogen purity
- Nitrogen purity
- Ethylene purity
- Natural gas purity

Specifications

Table 1 - Rosemount CT5800 Flameproof Process Gas Analyzer

Specifications	
Value	
Application	Flameproof Process Gas Analyzer
Measurement technique	IR absorption spectroscopy
IR source	QCL / TDL up to 6
Laser classification	Class 1 BS EN 60825-12007: Safety of laser products Equipment classification and requirements (identical to IEC 60825-1:2007)
Performance	
Repeatability	±1 % of measurement or limit of detection (LOD) whichever is greater
Linearity	R ² > 0.999
Measurement rate	1 Hz (up to 10 Hz on request)
Environmental	
Ambient temperature	-20 to 55 °C (-4 to 131 °F)
Sample gas temperature range	4 to 60 °C (39 to 140 °F)
Humidity range	10–95 %, non-condensing
Protection class	IP66/NEMA® 4X
Hazardous area classification	Europe: ATEX II 2G Ex d IIB+H2 T4 North America: Class I, Division 2, Groups B, C, D, T4
Certification number	IECEX: IECEX SIR 17.0026X ATEX: Sira 17ATEX1094X
Communications	
Analog signal out	4–20 mA (one per measurement)
Digital signal out	Modbus® over TCP/IP or RS-232
Health monitoring	Digital healthline (one per measurement) or NAMUR status report
Inlet gas port connector	6 mm (¼ in.) Swagelok® type (specify on order)
Outlet gas port connector	6 mm (¼ in.) Swagelok type (specify on order)
Electrical Rating	
Power supply	120 Vac 60 Hz / 240 Vac 50 Hz 200 V/A
Mechanical	
External dimensions (closed)	694.5 x 292 x 515 mm 27.34 x 11.5 x 20.28 in. (nominal dimensions)
External dimensions (open)	694.5 x 292 x 1047.5 mm 27.34 x 11.5 x 41.24 in. (nominal dimensions, front panel at lowest point)
Front panel swept radius	545 mm 21.46 in. (nominal dimension, 180° arc)
Weight	80 kg 176.37 lb (approximate weight)
Installation	Wall mount

Table 2 - Measurement Performance - Ethylene Production Purity

Measurement Range In Ethylene				
	Component	Range ⁽¹⁾	LOD ⁽²⁾	UOM
Process control	Methane	0-1000	5	ppmv
	Acetylene	0-20	0.2	ppmv
	Ethane	0-500	5	ppmv
	CO	0-5	0.05	ppmv
	CO ₂	0-100	0.05	ppmv
Adders for product certification	Ammonia	0-20	0.2	ppmv
	H ₂ S	0-50	2	ppmv
	Water	0-10	0.1	ppmv
	Methanol	0-100	1	ppmv

(1) Components and ranges are indicative. Analyzer requirements will depend on complete gas list. Detailed specs will be provided during the ordering process.

(2) Repeatability is ±1 % of reading or the Limit of Detection (LOD), whichever is greater.

Table 3 - Measurement Performance - Hydrogen / Nitrogen Purity

Component		Measurement Range		
Name	Symbol	Range	LOD	Repeatability ⁽¹⁾
Carbon monoxide	CO	0-5 ppm	0.05	±1 %
Carbon dioxide	CO ₂	0-5 ppm	0.02	±1 %
Water	H ₂ O	0-10 ppm	0.1	±1 %
Methane	CH ₄	0-50 ppm	0.5	±1 %
Ammonia	NH ₃	0-10 ppm	0.05	±1 %

(1) Repeatability is ±1 % of reading or the Limit of Detection (LOD), whichever is greater.

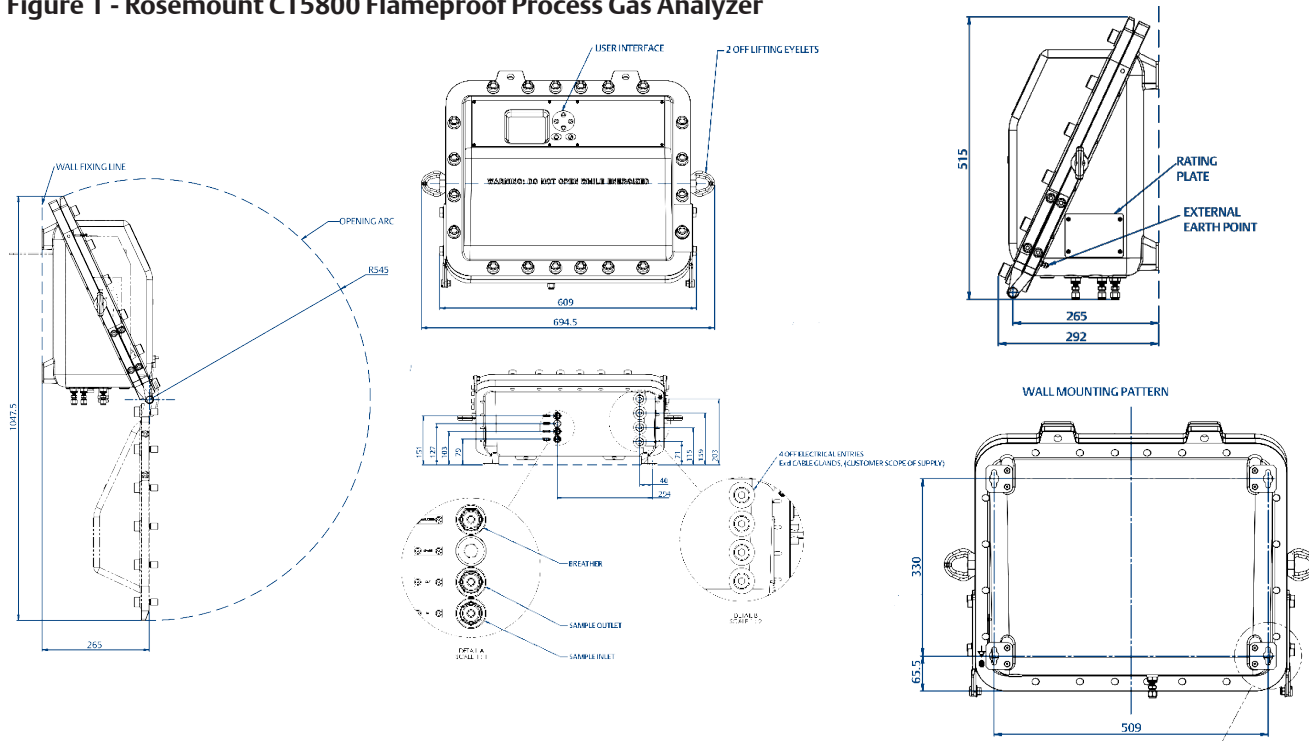
Other gases and ranges are available on request. The ranges and detection limits provided indicate typical analyzer performance but may change depending on your application. Please contact Rosemount for more information.





Recommended installation

The drawings below represent the minimum recommended installation guidelines for the Rosemount CT5800 Flameproof Process Gas Analyzer.

Please consult Rosemount for detailed installation recommendation of your application.

Figure 1 - Rosemount CT5800 Flameproof Process Gas Analyzer



-  [YouTube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)
-  [Twitter.com/Rosemount_News](https://twitter.com/Rosemount_News)
-  [Analyticexpert.com](https://www.analyticexpert.com)
-  [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

©2017 Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners.

North America
Emerson Automation Solutions
 10241 West Little York, Suite 200
 Houston, TX 77040
 Toll Free + 866 422 3683
 T + 713 396 8880
 F + 713 466 8175
 QCL.CSC@Emerson.com

Cascade Technologies
 Glendevon House
 Castle Business Park
 Stirling, FK9 4TZ
 Scotland
 T + 44 1786 447 721
 F + 44 1786 475 822
 QCL.CSC@Emerson.com

Middle East and Africa Regional Office
Emerson Automation Solutions
 Emerson FZE
 Jebel Ali Free Zone
 Dubai, UAE
 T + 971 4 811 8100
 F + 971 4 886 5465
 QCL.CSC@Emerson.com

Asia Pacific Regional Office
Emerson Automation Solutions
 Asia Pacific Private LTD
 1 Pandan Crescent
 Singapore 0512
 Singapore
 T + 65 777 8211
 F + 65 777 0947
 QCL.CSC@Emerson.com